



# LP400E ELECTRONIC WHEEL LOAD SCALE

## SPECIFICATIONS DATA SHEET "ALL GEC Products are made in the USA"

Operating Temperature	-20°F (-29°C) to 140°F (60°C)
Storage Temperature	-22°F (-30°C) to 176°F (80°C)
Internal Power Requirements	7.2 VDC (6x AA NiMH Rechargeable/ Disposable)
External Power Requirements	100/240 VAC, 47/63 Hz

### Options

- Wireless/Cabled communication
- Seamless Data Transfer
- Weight Management Software Including Center of Balance
- Optional Wireless or Cabled
- Multiple Scale Configuration (2,4,6,8)
- Windows 10 Tablet

### Dimensions

Overall Length	29.75" inches (75.6 cm)
Overall Width	21" inches (53.3 cm)
Height	2" inches (5.1 cm)

### Weighing Surface


Length	21.5" inches (54.6 cm)
Width	14.75" inches (37.5 cm)

Weight 48 lbs (21.8 kgs)

Capacity 0 to 40,000 lbs (0 to 18,143 Kgs)

### Features

- Solar Power Enhanced Battery Life
- Automatic Backlight sensor
- User Selectable Increments/Graduations
- Waterproof Membrane Switch and Enclosure
- Foldable Handles for Storage
- Rugged Design
- 6 AA Disposable or Rechargeable Batteries—400 Hours
- Cabled to read LCL/TTL weight up to 30 scales

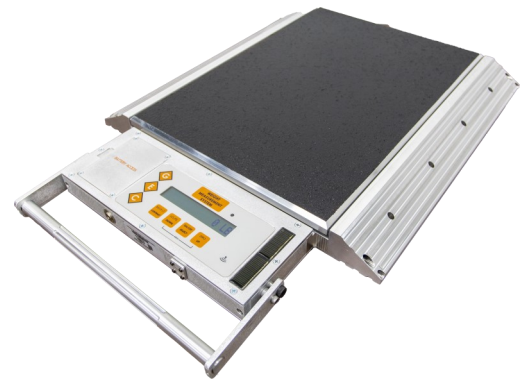

### Accuracy (per NIST Handbook 44 for Class III devices)

+/- 1% of Reading

0 to 2,500 lbs	± 50lbs.
2,500 to 10,000 lbs	± 100lbs.
10,000 to 20,000 lbs	± 150lbs.
20,000 to 40,000 lbs	± 250 lbs.



### PROPRIETARY NOTICE

This document contains information which concerns or relates to trade secrets, processes, operations, pricing, style of work apparatus, or to identity, confidential statistical data amount source or any income, profits, losses or expenditures of General Electrodynamics Corporation. Such information is being submitted in confidence with the understanding that it will not be disclosed to third parties in whole or part without the express written consent of an officer of General Electrodynamics Corp. (Reference Trade Sec. Rets Act, 18U.S.C. 1905)

LP400E