

## MD1100 Semi—Portable Axle Weigher SPECIFICATIONS DATA SHEET

**Accuracy (per NIST Handbook 44 for Class IIII devices)**

**“All GEC Products are Made in the USA”**

0 to 2,500 lbs ± 50lbs.	± 50lbs.
2,550 to 10,000 lbs	± 100lbs.
10,500 to 20,000 lbs	± 150lbs.
Operating Temperature	14°F (-10°C) to 122°F (50°C)
Storage Temperature	-20°F (-30°C) to 176°F (80°C)
Power Requirements	110 - 220 VAC
Options	<ul style="list-style-type: none"> <li>• Available in Kilogram graduation and Pounds</li> <li>• Wireless/Cabled Capability</li> </ul>
Accuracy	+/- 1% of applied load

**Overall Dimensions**


Overall Length	14 feet
Overall Width	30 inches
Height	3-1/2 inches

**Weighing Surface**

Length	11 feet
Width	30 inches
Weight	750 lbs. per side
Capacity	30,000 lbs. Single Axles 60,000 lbs. Tandem Axles 90,000 lbs. Triple Axles



- Semi-portable**
- Axles Sizes—7ft.,11ft.,12ft.**
- Easy set-up**
- Individual Axle, Net, and Gross Weights**
- Comes with Trailer**
- User Friendly Technology**
- Print Ticket**
- Fits Tandem Tires**

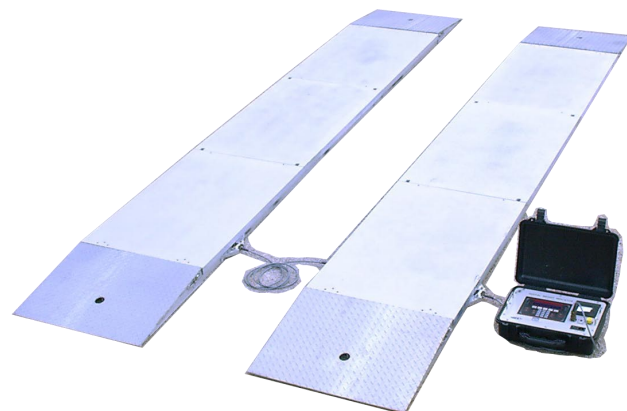

PROPRIETARY NOTICE

This document contains information which concerns or relates to trade secrets, processes, operations, pricing, style of work apparatus, or to identity, confidential statistical data amount source or any income, profits, losses or expenditures of General Electroynamics Corporation. Such information is being submitted in confidence with the understanding that it will not be disclosed to third parties in whole or part without the express written consent of an officer of General Electroynamics Corp.  
 (Reference Trade Sec. Rets Act, 18U.S.C. 1905)

M  
D  
1  
1  
0  
0