


WEIGH IN MOTION VEHICLE PROFILING SYSTEM

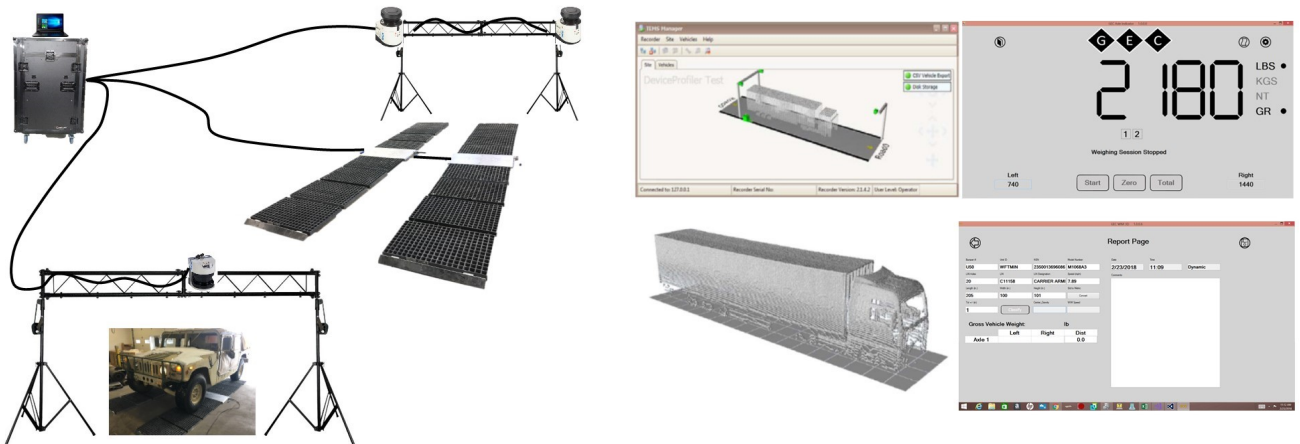

Weigh in Motion System Specifications

Description	Specifications	Units
Scale Capacity (per side)	0 to 20,000 (9072)	Lbs /(Kgs)
Overload Capacity	150	%
Axle Capacity	0 to 40,000 (18143)	Lbs /(Kgs)
Static Accuracy	+/- 1%	%
Dynamic Accuracy	+/- 2%	%
Operating Speed	0-8 (12.87)	Mph (Kmh)
Scale Dimensions	32" W x 18" L x 1.8" H (812.8 W x 457.2 L x 45.72)	Inches (mm)
Weight per pad	60 (27.21)	Lbs (Kgs)

Vehicle Profiling System Specifications

Operating Speed	0-4.3 (0-7)	mph (km/h)
Length Measurement Accuracy	+/- 3.937 (100)	In (mm)
Width Measurement Accuracy	+/- 2.362 (60)	In (mm)
Height Measurement Accuracy	+/- 2.362 (60)	In (mm)
Minimum object size	39.37 x 23.62 x 23.62 (1 x 0.6 x 0.6 , L x W x H)	In (meters)
Maximum object size	1181 x 180 x 169 (30 x 4.572 x 4.297, L x W x H)	In (meters)

Features

- 3D Point Cloud Image of Vehicle Profile with a Post Edit Feature
- Static / Dynamic mode of Operation with WIM
- Portable or Fixed Ground System
- Easy setup and take down
- Automatic Axle count, Axle weight, Gross weight & Center of Balance Computations
- Automated Vehicle Classification
- Output file configurable to integrate with higher level load planning software

PROPRIETARY NOTICE

This document contains information which concerns or relates to trade secrets, processes, operations, pricing, style of work apparatus, or to identity, confidential statistical data amount source or any income, profits, losses or expenditures of General Electrodynamics Corporation. Such information is being submitted in confidence with the understanding that it will not be disclosed to third parties in whole or part without the express written consent of an officer of General Electrodynamics Corp.

(Reference Trade Sec. Rets Act, 18U.S.C. 1905)

W
I
M

V
P
S